


Important Notes for Installation of SOHO, MELROSE, BOWERY, ASTORIA, GREENWICH & LIBERTY doors

These doors are designed with narrow components, so extra care should be taken to prevent glass breakage or damage to the door structure.

1. The maximum trimming allowed on each door edge is 5mm.
2. The maximum depth allowed for drilling lock holes is 58mm (see the diagram below).
For sliding and pocket doors, the maximum allowed width for drilling for flush handles cannot exceed 58mm.
3. Touch-up paint is required as the pine core will be exposed after trimming. Please find the RAL colour details below.
4. Due to the weight of the glass/panel, a minimum of 3 hinges must be used for each door.

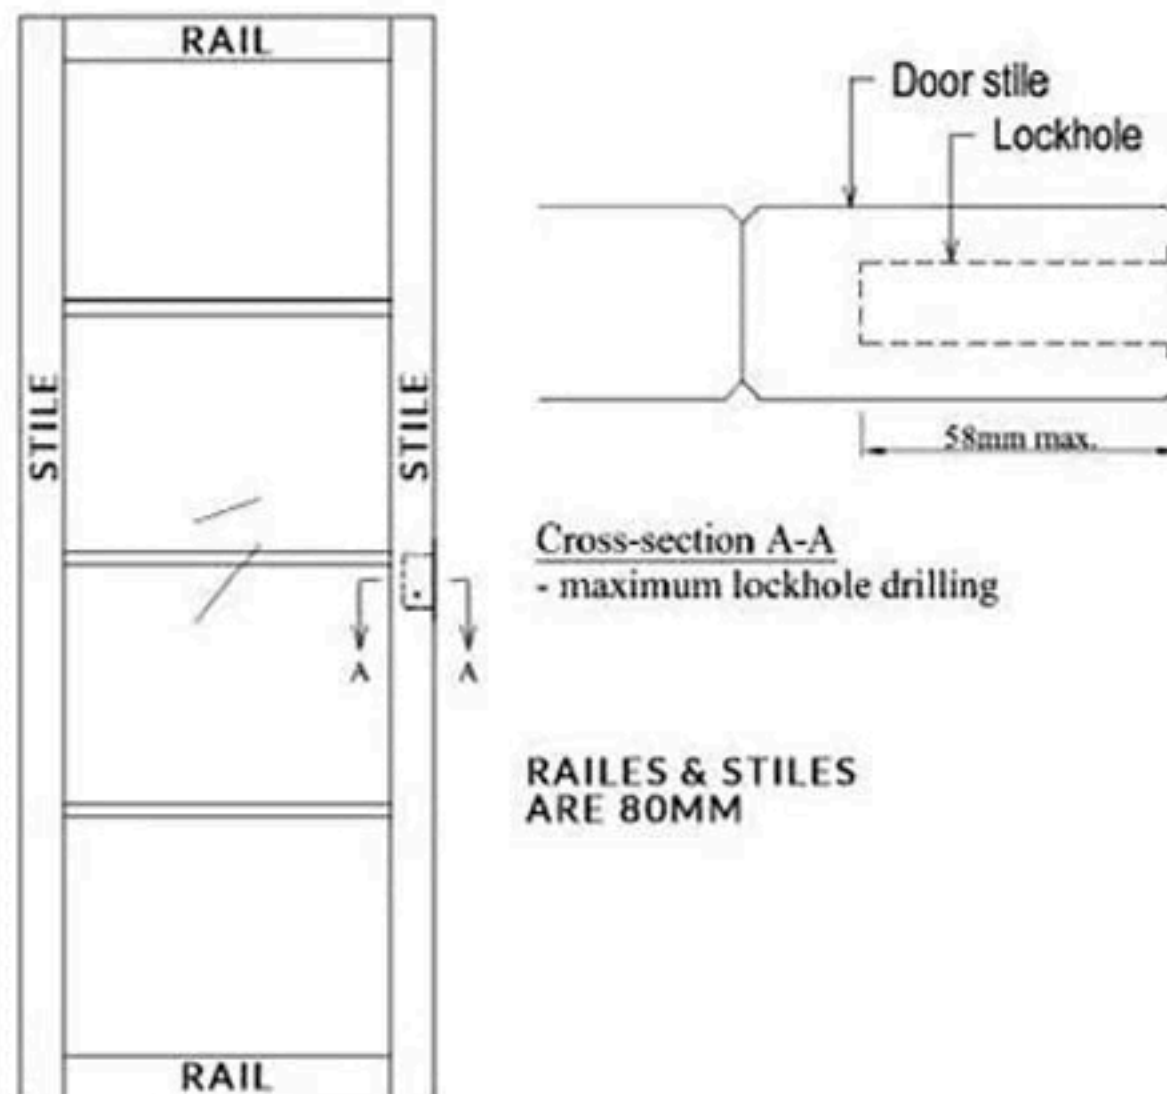

RAL Colour Guide

All black doors mentioned above:
RAL 9011 10-15% Glossiness